

**Experience  
the Power  
of Red**




**CP721**

**CP7722**

**CP7731**

**CP7731C**

### 3/8 inch

MODEL	PART NUMBER	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
		rpm	ft.lb	Nm	ft.lb	Nm		cfm	l/s	in.	mm	kg	
<b>CP721</b>	<b>T021963</b>	11,000	5-50	7-68	75	102	Rocking-Dog	10	4.7	5.8	146	1.2	VS
<b>CP7722</b>	<b>894 107 7220</b>	15,000	5-65	7-88	90	120	Rocking-Dog	3.2	1.5	6.3	160	1.0	VS
<b>CP 7731</b>	<b>894 107 7310</b>	6,400	71-240	96-328	305	415	Jumbo	4.5	2.1	4.4	112	1.3	VS
<b>CP 7731C</b>	<b>894 107 7311</b>	9,000	61 - 289	83-392	347	469	Single Dog	4.3	2.0	4.2	110	1	VS


**CP7729**

**CP8222P**

**CP6300 RSR**

**CP6728P05 R**

### 3/8 inch

MODEL	PART NUMBER	FREE SPEED	BLOWS PER MIN	WORKING TORQUE (FW)		MAX TORQUE (REV)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
		rpm		ft.lb	Nm	ft.lb	Nm		cfm	l/s	in.	mm	kg	
<b>CP7729</b>	<b>894 107 7290</b>	9,400	1700	50-300	68-407	415	563	Twin Hammer	20	9.4	6.4	163	1.3	VS
<b>CP8222P</b>	<b>615 159 0180</b>	11,500	1250	60-295	80-400	332	450	Twin Hammer	21	10	7	177	1.2	IND
<b>CP8222R</b>	<b>615 159 0230</b>	11,500	1250	60-295	80-400	332	450	Twin Hammer	21	10	7	177	1.2	IND
<b>CP6300 RSR</b>	<b>T025285</b>	6,800	1,800	40-150	54-203	180	243	Single-Dog	14	6.6	6.0	152	1.6	IND
<b>CP6728 P05 R</b>	<b>615 159 0550</b>	11,500	1,300	80-260	110-350	350	475	2-Jaw	24.2	11.4	6.9	175	1.7	IND


**CP726H**

**CP734H**

**CP749**

**CP7739**


### 1/2 inch

MODEL	PART NUMBER	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
		rpm	ft.lb	Nm	ft.lb	Nm		cfm	l/s	in.	mm	kg	
<b>CP726H</b>	<b>894 100 7261</b>	9,600	68-190	92-257	200	271	Pin clutch	15	7.1	5.7	146	1.40	VS
<b>CP734H</b>	<b>T024351</b>	8,400	25-310	34-420	425	576	Pin clutch	15	7.1	7.5	191	2.3	VS
<b>CP749</b>	<b>T024587</b>	6,400	50-450	68-610	610	827	Spring Hammer	22	10.4	7.0	178	2.5	VS
<b>CP7739</b>	<b>894 107 7390</b>	9,900	50-305	68-414	450	610	Twin Hammer	20	9.4	6.4	163	1.2	VS



## 1/2 inch

MODEL	PART NUMBER	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
		rpm	ft.lb	Nm	ft.lb	Nm		cfm	l/s	in.	mm	kg	
<b>CP 7732</b>	<b>894 107 7320</b>	9,000	102-310	138-420	450	610	Single Dog	5	2.4	4.4	112	1.3	VS
<b>CP 7732C</b>	<b>894 107 7321</b>	9,410	52-285	70-387	460	625	Jumbo	5.5	2.6	4.3	108	1	VS
<b>CP 7741</b>	<b>894 107 7410</b>	10,000	90-510	120-690	715	970	Double Dog	4.45	2.1	7.64	194	2.25	VS
<b>CP 7748G</b>	<b>894 107 7481</b>	7,000	70-555	95-750	960	1300	Twin Hammer	6.2	3	6.89	175	2	VS
<b>CP 7748TL</b>	<b>894 107 7487</b>	7,000	66-103	90-140	960	1300	Twin Hammer	6.2	3	6.89	175	2	VS



## 1/2 inch

MODEL	PART NUMBER	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
		rpm	ft.lb	Nm	ft.lb	Nm		cfm	l/s	in.	mm	kg	
<b>CP8242R</b>	<b>615 159 0240</b>	11,500	59-295	80-400	406	550	Twin Hammer	21	10	6.9	175	1.2	IND
<b>CP8252P</b>	<b>615 159 0210</b>	9,000	111-553	150-750	701	950	Twin Hammer	21	10	6.9	175	2	IND
<b>CP8252R</b>	<b>615 159 0250</b>	9,000	111-553	150-750	701	950	Twin Hammer	25	12	7.9	200	2	IND
<b>CP7755 Airflex Mini</b>	<b>894 1077 551</b>	7,700	59-425	80-575	960	1300	Twin Hammer	3.9	1.8	6.5	169	1.93	VS
<b>CP 7737</b>	<b>894 107 7370</b>	9,000	25-165	34-224	220	300	Jumbo	4	1.9	9.4	240	1.13	VS

(P) - Pin Retainer (FR) - Friction Ring



## 1/2 inch

MODEL	PART NUMBER	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
			ft.lb	Nm	ft.lb	Nm		cfm	l/s	in.	mm	kg	
<b>CP6738 P05R</b>	<b>615 159 0560</b>	11,500	80-260	110-350	350	475	Twin Hammer	24.2	11.4	6.9	175	1.7	IND
<b>CP6748 EX-P11R ATEX</b>	<b>615 159 0570</b>	8,400	130-560	180-760	800	1,085	Twin Hammer	30	14.2	7.9	200	2.4	IND
<b>CP6500 RSR</b>	<b>T025216</b>	6,400	125-502	170-680	625	850	Double-Dog	25	11.8	7.0	178	2.7	IND
<b>CP9541</b>	<b>615 190 9541</b>	8,900	25-320	34-434	450	610	Pin clutch	13	6.1	6.6	168	2.5	MRO



All models hose Inlet 3/8" (10mm) @ 90 PSI (6.3 Bar)

VS: Vehicle Service • IND: Industrial


**CP772H**

**CP772H-6**

**CP7763**

**CP7769**

**3/4 inch**

MODEL	PART NUMBER	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
		rpm	ft.lb	Nm	ft.lb	Nm		cfm	l/s	in.	mm	kg	
<b>CP772H</b>	<b>T024598</b>	4,200	150-700	203-949	1,000	1,356	Pin Clutch	24	11.3	9.6	245	4.8	VS
<b>CP772H-6</b>	<b>T024757</b>	4,200	150-700	203-949	1,000	1,356	Pin Clutch	24	11.3	15.5	394	5.3	VS
<b>CP7763</b>	<b>894 107 7630</b>	6,300	100-950	136-1,288	1,200	1,627	Twin Hammer	30	14.2	8.8	224	5.3	VS
<b>CP7763-6</b>	<b>894 107 7636</b>	6,300	100-950	136-1,288	1,200	1,627	Twin Hammer	30	14.2	15.0	381	6.3	VS
<b>CP7769</b>	<b>894 107 7691</b>	6,500	300-1,080	407-1,464	1,440	1,950	Twin Hammer	10.2	4.8	7.9	200	3.15	VS


**CP8272D**

**CP6768 EX-P18D**

**CP6763D**

**CP7630**

**CP7762**
**3/4 inch**

MODEL	PART NUMBER	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
		rpm	ft.lb	Nm	ft.lb	Nm		cfm	l/s	in.	mm	kg	
<b>CP8272D</b>	<b>615 159 0260</b>	6,500	184-922	250-1,250	1,217	1,650	Twin Hammer	38	118	9.1	230	3.65	IND
<b>CP6768EX-P18D</b>	<b>615 159 0580</b>	5,100	290-1,030	400-1,400	1,290	1,750	Twin Hammer	38	18	10	250	4.4	IND
<b>CP6763</b>	<b>615 159 0400</b>	6,300	260-950	350-1,290	1,200	1,630	Twin Hammer	30	14.2	8.7	222	5.5	IND
<b>CP7630</b>	<b>894 107 6300</b>	6,900	130-810	177-1,097	1,100	1,500	Twin Hammer	5.1	2.4	9.45	240	4.8	VS
<b>CP 7762</b>	<b>894 107 7620</b>	4,850	150-670	200-900	1,050	1,420	Twin Hammer	8.78	4.1	6.2	158	2.9	VS
<b>CP9561</b>	<b>615 190 9561</b>	5,500	150-700	200-950	885	1,250	Pin Clutch	30	14.1	8.5	216	5.1	MRO
<b>CP6060-P15R</b>	<b>615 159 0100</b>	4,000	200-900	270-1,220	1,100	1,490	2-Jaw Clutch	52.9	25	8.7	222	5.3	IND


**CP5000**

**CP797**

**CP797-6**

**CP7783-6**

**1 inch**

MODEL	PART NUMBER	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
		rpm	ft.lb	Nm	ft.lb	Nm		cfm	l/s	in.	mm	kg	
<b>CP5000</b>	<b>T024585</b>	3,700	185-2,605	240-2,800	2,500	3,390	Rocking-Dog	52	25.0	22.5	572	16.2	VS
<b>CP797</b>	<b>T019139</b>	4,200	150-900	203-1,220	1,400	1,898	Rocking-Dog	40	18.9	15.5	394	12.3	VS
<b>CP797-6</b>	<b>T023187</b>	4,200	150-900	203-1,220	1,400	1,898	Rocking-Dog	40	18.9	22.2	565	13.5	VS
<b>CP7783-6</b>	<b>894 107 7836</b>	6,200	413-1,253	560-1,700	1,770	2,400	Rocking-Dog	10.1	4.75	19.6	500	9.5	VS


**CP6773**

**CP7776**

**CP6773D-18D**

**CP6778**
**1 inch**

MODEL	PART NUMBER	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
		rpm	ft.lb	Nm	ft.lb	Nm		cfm	l/s	in.	mm	kg	
<b>CP6773</b>	<b>615 159 0410</b>	6,300	260-950	350-1,290	1,200	1,630	Twin Hammer	30	14.2	8.8	228	5.6	IND
<b>CP6773-D18D</b>	<b>615 159 0650</b>	6,600	250-1,070	340-1,450	1,300	1,760	Twin Hammer	41	19.3	11.4	290	6.7	IND
<b>CP7776</b>	<b>894 107 7760</b>	5,000	704-1,530	955-2,073	1,770	2,400	Rocking Dog	8.2	3.9	11.4	289	11.2	VS
<b>CP6778EX-P18D</b>	<b>615 159 0590</b>	5,100	290-1,030	400-1,400	1,290	1,750	Twin Hammer/Oil Bath	38	18	10.1	255	4.6	IND

All models hose size 1/2" (13mm) @ 90 PSI (6.3 Bar)

VS: Vehicle Service • IND: Industrial



## 1 inch

MODEL	PART NUMBER	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
		rpm	ft.lb	Nm	ft.lb	Nm		cfm	l/s	in.	mm	kg	
<b>CP7773</b>	<b>894 107 7730</b>	6,300	100-950	136-1,288	1,200	1,627	Twin Hammer	30	14.2	9.2	235	5.5	VS
<b>CP7782</b>	<b>894 107 7820</b>	5,160	440-1850	500-2,000	1,920	2,600	Rocking-Dog	40.7	19.2	14.7	370	10.1	VS
<b>CP7782-6</b>	<b>894 107 7826</b>	5,160	440-1850	500-2,000	1,920	2,600	Rocking-Dog	40.7	19.2	20.4	520	11.6	VS



## 1 inch

MODEL	PART NUMBER	FREE SPEED	BLOWS PER MIN	WORKING TORQUE (FW)		MAX TORQUE (REV)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
		rpm		ft.lb	Nm	ft.lb	Nm		cfm	l/s	in.	mm	kg	
<b>CP0611P RS</b>	<b>615 159 0050</b>	3,500	1,020	900-1,800	1,220-2,440	2,800	3,790	2-Jaw	48	22.6	10.7	272	10.5	IND
<b>CP0611 D28H</b>	<b>615 159 0160</b>	3,500	1,020	900-1,800	1,220-2,440	2,800	3,790	2-Jaw	68	32	14.2	360	10.4	IND
<b>CP6910 P24</b>	<b>615 159 0070</b>	5,000	700	370-1,550	500-2,100	1,920	2,600	Rocking-Dog	40.2	19	11.4	290	10.2	IND
<b>CP6920 D24</b>	<b>615 159 0080</b>	5,000	700	370-1,550	500-2,100	1,920	2,600	Rocking-Dog	40.2	19	11.4	360	10.3	IND



## 1 1/2 inch

MODEL	PART NUMBER	FREE SPEED	BLOWS PER MIN	WORKING TORQUE (FW)		MAX TORQUE (REV)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
		rpm		ft.lb	Nm	ft.lb	Nm		cfm	l/s	in.	mm	kg	
<b>CP6930-D35</b>	<b>615 159 0390</b>	4,300	850	4,45-1,950	600-2,650	2,875	3,900	Twin Hammer	64	30	17.3	440	14.4	IND
<b>CP6120 D35H</b>	<b>615 159 0120</b>	3,500	960	600-2,000	815-2,710	3,600	4,880	2-Jaw	60	28.3	16.5	420	15.65	IND
<b>CP6135-D80</b>	<b>615 159 0380</b>	2,800	750	740-4055	1000-5500	5900	8000	Rocking Dog	84.5	40	16	408	16	IND
<b>CP6130-T70</b>	<b>615 159 0010</b>	4,000	180	2,430-5,240	3,300-7,100	9,220	12,500	Rocking Dog	67.3	31.76	19.7	500	33	IND
<b>CP6240-T120</b>	<b>615 159 0020</b>	3,000	800	3760-9150	5100-12400	18440	25000	Double Rocking Dog	74.9	35.34	24.1	610	60	IND



All models 1" Impact: Hose size 1/2" (13mm) & 1.1/2" Impacts: Hose size 3/4" (19mm) @ 90 PSI (6.3 Bar)  
 CP6240-T120 is 2-1/2" T-Handle impact wrench



**CP7600XB-R4P**



**CP7600XB**



1 inch

MODEL	PART NUMBER	FREE SPEED	SHUTOFF TORQUE RANGE				AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEGMENT
			MIN		MAX		cfm	l/s	in.	mm		
			ft.lb	Nm	ft.lb	Nm						
<b>CP7600XB-R4P</b>	<b>894 107 6015</b>	100	330	450	660	900	40	19	15	380	6.9	VS/IND
<b>CP 7600XC-RP</b>	<b>894 107 6025</b>	100	330	450	660	900	40	19	15	380	6.9	VS/IND
<b>CP7600XB</b>	<b>894 107 6010</b>	100	330	450	660	900	40	19	12.9	328	6	VS/IND
<b>CP7600XB-R</b>	<b>894 107 6011</b>	100	330	450	660	900	40	19	13.6	345	6.6	VS/IND

## Stall Torque Nutrunners



**CP66XX SERIES**



**ATC PACK**



MODEL	PART NUMBER	FREE SPEED	SHUTOFF TORQUE RANGE				SQUARE DRIVE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEG.
			MIN		MAX			cfm	l/s	in.	mm		
			ft.lb	Nm	ft.lb	Nm							
<b>CP6613 + ATC Pack</b>	<b>615 180 0120</b>	20	236	320	960	1300	3/4"	48	23	10	254	4.4	IND
<b>CP6626 + ATC Pack</b>	<b>615 180 0130</b>	10	520	700	1900	2600	1"	48	23	12	300	6.5	IND
<b>CP 6641 + ATC Pack</b>	<b>615 180 0140</b>	10	738	1000	3100	4100	1"	65	31	14	361	10.8	IND

## Cordless Tools/Nutrunners



**CP8854**



**CP8854-2**



MODEL	PART NUMBER	FREE SPEED	SHUTOFF/STALL TORQUE RANGE				SQUARE DRIVE	BATTERY CAPACITY		OVERALL LENGTH		NET WEIGHT	ACCURACY @6 SIGMA	SEG.
			MIN		MAX			Voltage	Current	in.	mm			
			ft.lb	Nm	ft.lb	Nm								
<b>CP8854 Pack</b>	<b>894 108 8540</b>	4500	89	120	780	1050	1/2"	18	2.5	7.5	189	2.5	NA	VS
<b>CP8854-2 Pack</b>	<b>894 108 8542</b>	4500	89	120	780	1050	1/2"	18	2.5	9.6	239	2.6	NA	VS



**CP86XX + CPLinQ**



**CP86XX Series**



MODEL	PART NUMBER	FREE SPEED	SHUTOFF/STALL TORQUE RANGE				SQUARE DRIVE	BATTERY CAPACITY		OVERALL LENGTH		NET WEIGHT	ACCURACY @6 SIGMA	SEG.
			MIN		MAX			Voltage	Current	in.	mm			
			ft.lb	Nm	ft.lb	Nm								
<b>CP8603</b>	<b>615 157 0400</b>	20	50	70	240	325	3/4"	36	2.5	11.1	281	4.1	+/- 4%	IND
<b>CP8613</b>	<b>615 157 0020</b>	10	110	150	960	1300	3/4"	36	2.5	12.5	318	5.3	+/- 4%**	IND
<b>CP8626</b>	<b>615 157 0050</b>	5	260	350	1910	2600	1"	36	2.5	14.3	363	7.2	+/- 4%**	IND
<b>CP8641</b>	<b>615 157 0070</b>	3	370	500	3020	4100	1"	36	2.5	16.1	409	11.4	+/- 4%**	IND
<b>CP8681</b>	<b>615 157 0200</b>	1.2	735	1000	5970	8100	1- 1/2"	36	2.5	16.3	414	16.5	+/- 4%**	IND

VS: Vehicle Service • IND: Industrial


**CP9426**

**CP9427**

**CP825C**

**CP826**

MODEL	PART NUMBER	ANVIL SIZE	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEGMENT
		in	rpm	ft.lb	Nm	ft.lb	Nm	cfm	l/s	in	mm	kg	
<b>CP9426</b>	<b>615 191 9426</b>	1/4"	270	5-27	7-35	27	35	12	5.6	5.0	128	0.49	VS/IND
<b>CP9427</b>	<b>615 191 9427</b>	3/8"	270	5-27	7-35	27	35	12	5.6	5.0	128	0.49	VS/IND
<b>CP825C</b>	<b>894 108 2511</b>	1/4"	200	4-18	5-25	26	35	3.2	1.5	6.6	169	0.50	VS/IND
<b>CP826</b>	<b>T025074</b>	1/4"	250	5-15	7-21	15	21	14	6.6	8.0	203	0.51	VS/IND
<b>CP826T</b>	<b>T025075</b>	3/8"	250	5-15	7-21	15	21	14	6.6	8.0	203	0.51	VS/IND


**CP828**

**CP886**

**CP7830HQ**


MODEL	PART NUMBER	ANVIL SIZE	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEGMENT
		in	rpm	ft.lb	Nm	ft.lb	Nm	cfm	l/s	in	mm	kg	
<b>CP828</b>	<b>T022708</b>	3/8"	150	10	14	50	68	15	7.1	10	254	1.08	VS/IND
<b>CP886</b>	<b>T024240</b>	3/8"	160	10	13	50	68	17	8.0	10.2	260	1.19	VS/IND
<b>CP7830Q</b>	<b>894 107 8306</b>	3/8"	190	10	13	90	122	21	8.7	12	305	1.22	VS/IND
<b>CP828H</b>	<b>T022970</b>	1/2"	150	10	14	50	68	15	7.1	10	254	1.08	VS/IND
<b>CP886H</b>	<b>T024391</b>	1/2"	160	10	13	50	68	17	8.0	10.2	260	1.19	VS/IND
<b>CP7830HQ</b>	<b>894 107 8308</b>	1/2"	190	10	13	90	122	21	8.7	12	305	1.22	VS/IND

# Screwdrivers


**CP781**

**CP2812**

**CP2814**

**CP2824**


MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE Nm		CLUTCH TYPE	AIR CONSUMPTION AT LOAD		OVERALL LENGTH		NET WEIGHT	SEGMENT
		rpm	Min	Max		cfm	l/s	in.	mm	kg	
<b>CP781 (P)</b>	<b>T025096</b>	800	6.2	11.3	Cushion	16	7.6	8.9	226	1.36	VS
<b>CP2765 (P)</b>	<b>615 192 2765</b>	900	-	9	Positive	10	4.7	7.0	178	1.18	IND
<b>CP2780 (P)</b>	<b>615 192 2780</b>	2,100	-	10	Positive	10	4.7	6.5	164	1.06	IND
<b>CP2755 (P)</b>	<b>615 192 2755</b>	2,200	-	7.3	Positive	10	4.7	6.3	160	1.03	IND
<b>CP2810</b>	<b>615 163 0070</b>	2400	-	4.5	Shut Off	11.9	5.6	7.2	183	0.8	IND
<b>CP2811</b>	<b>615 163 0060</b>	750	-	12	Shut Off	11.9	5.6	8	204	0.9	IND
<b>CP2812</b>	<b>615 163 0080</b>	950	2.5	11	Shut Off	17.8	8.4	7.2	232	1.1	IND
<b>CP2814</b>	<b>615 192 2005</b>	1100	0.4	4.3	Shut Off	13.8	6.5	7.2	182	0.8	IND
<b>CP2822</b>	<b>615 163 0090</b>	1300	2	6	Shut Off	8.5	4	9.8	250	0.9	IND
<b>CP2824</b>	<b>6151630100</b>	1500	0.5	1.6	Shut Off	12.7	6	8.7	230	0.9	IND

VS: Vehicle Service • IND: Industrial


**CP2611**

**CP2621**

**CP2136**

**CP2141**

MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE (FW)		CLUTCH TYPE	AIR CONSUMPTION AT FREE SPEED		OVERALL LENGTH		NET WEIGHT	SEGMENT
		rpm	ft.lb	Nm		cfm	l/s	in.	mm		
<b>CP2611 (P)</b>	<b>615 192 2611</b>	1,000	0.74-5.53	1.0-7.5	Shut-Off	21.2	10	9.3	235	1.1	IND
<b>CP2612 (P)</b>	<b>615 192 2612</b>	1,700	0.74-4.42	1.0-6.0	Cushion	21.2	10	7.5	190	0.9	IND
<b>CP2621 (SP)</b>	<b>615 192 2621</b>	1,000	0.6-4.79	0.7-6.5	Shut-Off	30.9	14.6	9.1	232	0.8	IND
<b>CP2622 (SP)</b>	<b>615 192 2622</b>	1,700	0.37-3.32	0.5-4.5	Shut-Off	29	13.7	9.1	232	0.8	IND
<b>CP2623 (SL)</b>	<b>615 192 2623</b>	1,700	1.1-4.1	1.5-5.5	Cushion	27.7	13.1	8.2	207	0.8	IND
<b>CP2136</b>	<b>894 102 1360</b>	10,000	5.9-15.5	8.0-21.0	Impact	8.8	4.2	7.3	185	0.7	IND
<b>CP2141</b>	<b>894 102 1410</b>	13,000	7.4-17.7	10.0-24.0	Impact	18.1	8.5	5.6	143	0.9	IND

## Die Grinders


**CP3000**

**CP3030**

**CP872**

**CP876**


MODEL	PART NUMBER	FREE SPEED	POWER		COLLECT MAX CAPACITY		AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT	RATING
		rpm	hp	Watt	in	mm	cfm	l/s	cfm	l/s	in.	mm		
<b>CP872</b>	<b>T025373</b>	27,000	0.60	470	1/4	6	13	6.1	26	12.2	6.49	165	0.57	*
<b>CP876</b>	<b>T023996</b>	30,000	0.3	220	1/4	6	12	5.6	24	11.3	4.8	121	0.3	*
<b>CP3000-600 CR</b>	<b>615 160 0330</b>	60,000	0.1	90	1/8	3	5.5	2.6	5.5	2.6	6	153	0.1	**
<b>CP3000-330R</b>	<b>615 160 0160</b>	30,000	0.4	305	1/4	6	23.3	11	19.1	9	5.9	150	0.4	**
<b>CP3030-325R</b>	<b>615 160 4090</b>	25,000	0.4	270	1/4	6	21.2	10	17	8	6	154	0.5	**
<b>CP3030-330R</b>	<b>615 160 4100</b>	30,000	0.4	305	1/4	6	21.2	10	19.1	9	6	154	0.5	**
<b>CP3000-515R</b>	<b>615 160 0270</b>	15,000	0.7	500	1/4	6	29.7	14	25.4	12	7.6	195	0.8	**
<b>CP3030-520R</b>	<b>615 160 4200</b>	20,000	0.7	500	1/4	6	32.9	15.5	30	14	6.8	174	0.8	**
<b>CP3019-12AC</b>	<b>615 160 4070</b>	12,000	0.5	375	1/4	6.35	6.8	3.2	17.0	8.0	8.5	216	0.5	***
<b>CP3019-20AC</b>	<b>615 160 4080</b>	20,000	0.5	375	1/4	6.35	11.2	5.3	19.9	9.4	8.5	216	0.5	***
<b>CP3019-25</b>	<b>615 160 0110</b>	25,000	0.5	375	1/4	6.35	8.5	4	19.1	9.0	6.6	169	0.4	***
<b>CP3019-31ES</b>	<b>615 160 2190</b>	31,000	0.5	375	1/4	6.35	10.0	4.7	19.9	9.4	9.8	249	0.6	***
<b>CP3019-40ES</b>	<b>615 160 2200</b>	40,000	0.5	375	1/4	6.35	14.8	7	21.2	10.0	9.8	249	0.6	***
<b>CP3119-12EL</b>	<b>615 160 2150</b>	12,000	1.2	900	1/4	6.35	13.0	6	33.9	16.0	24.1	603	2.1	***
<b>CP3119-12EXL</b>	<b>615 160 2160</b>	12,000	1.2	900	1/4	6.35	13.0	6	33.9	16.0	34.1	603	2.1	***


**CP860**

**CP860ES**

**CP9113GES**

MODEL	PART NUMBER	FREE SPEED	POWER		COLLECT MAX CAPACITY		AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT	RATING
		rpm	hp	kW	in	mm	cfm	l/s	cfm	l/s	in.	mm		
<b>CP860</b>	<b>T019704</b>	24,000	0.5	0.4	1/4	6.4	10.5	4.9	21	9.9	5.8	146	0.6	*
<b>CP860E</b>	<b>T021136</b>	24,000	0.5	0.4	-	6.0	10.5	4.9	21	9.9	5.8	146	0.6	*
<b>CP860ES</b>	<b>T023193</b>	24,000	0.5	0.4	1/4	6.4	11.5	5.4	23	10.9	11.8	294	1.0	*
<b>CP9113G</b>	<b>615 160 0010</b>	25,000	1	0.75	1/4	6.35	31.8	15	31.8	15.0	6.7	179	1.1	**
<b>CP9113GES</b>	<b>615 160 2070</b>	25,000	1	0.75	1/4	6.35	31.8	15	31.8	15.0	12.6	320	1.62	**

VS: Vehicle Service • IND: Industrial




**CP875**

**CP9107**

**CP7405**

**CP7412**


MODEL	PART NUMBER	FREE SPEED	POWER		COLLECT MAX CAPACITY		AVERAGE AIR CONS.		EXHAUST	OVERALL LENGTH		NET WEIGHT	RATING
		rpm	hp	kW	in	mm	cfm	l/s		in.	mm	kg	
<b>CP875</b>	<b>T023995</b>	22,500	0.3	0.22	1/4	6	11	5.2	Rear	4.9	124	0.5	*
<b>CP9107</b>	<b>615 195 9107</b>	17,000	0.20	0.15	1/4	6	8	4.2	Rear	4.7	120	0.7	*
<b>CP7405</b>	<b>894 107 4050</b>	28,000	0.34	0.25	1/4	6	2.7	1.3	Rear	6.9	176	0.5	*
<b>CP7406</b>	<b>894 107 4060</b>	23,000	0.34	0.25	1/4	6	2.7	1.3	Rear	6.4	163	0.6	*
<b>CP7408</b>	<b>894 107 4080</b>	23,000	0.34	0.25	1/4	6	2.7	1.3	Rear	7.7	195	0.62	*
<b>CP7410</b>	<b>894 107 4100</b>	27,000	0.34	0.25	1/4	6	2.7	1.3	Rear	9.8	248	0.65	*
<b>CP7411</b>	<b>894 107 4110</b>	22,000	0.56	0.42	1/4	6	3.6	1.7	Rear	7.1	180	0.7	*
<b>CP7412</b>	<b>894 107 4120</b>	22,000	0.56	0.42	1/4	6	3.6	1.7	Rear	13	330	1.1	*


**CP3451**

**CP3550-180**

**CP3550-180**


MODEL	PART NUMBER	FREE SPEED	POWER		COLLECT MAX CAPACITY		EXHAUST	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	NOISE LEVEL	VIBRATION	RATING
		rpm	KW	hp	mm	in		l/s	cfm	mm	in.	kg	dB(A)	m/s <sup>2</sup>	
<b>CP3451-18SEC</b>	<b>615 160 2010</b>	18,000	0.75	1.0	6.35	1/4	Rear	19.1	40.5	330	13.0	1.4	91	<2.5	**
<b>CP3550-120</b>	<b>615 160 0620</b>	12,000	1.05	1.4	6.35	1/4	Rear	8	19	248	9.8	1.2	74	<2.5	**
<b>CP3550-120ACC</b>	<b>615 160 4420</b>	12,000	1.1	1.5	6.35	1/4	Rear	17	36	249	9.8	1.5	84	<6.1	**
<b>CP3550-120ES</b>	<b>615 160 2350</b>	12,000	1.05	1.4	6.35	1/4	Rear	8	19	365	14.4	1.4	77	<2.5	**
<b>CP3550-180</b>	<b>615 160 0630</b>	18,000	1.05	1.4	6.35	1/4	Rear	17	36	248	9.8	1.2	80	<3.5	**
<b>CP3550-180ES</b>	<b>615 160 2360</b>	18,000	1.05	1.4	6.35	1/4	Rear	17	36	365	14.4	1.4	81	<2.5	**

# Angle Grinders


**CP7500D**

**CP854**

**CP9120CR**

MODEL	PART NUMBER	FREE SPEED	POWER		CAPACITY WHEEL		SPINDLE THREAD	AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT	RATING
		rpm	hp	kW	in	mm	in	cfm	l/s	cfm	l/s	in.	mm	kg	
<b>CP7500D</b>	<b>894 107 5001</b>	22,000	0.2	0.15	2	50	3/8-24	4	1.9	8	3.7	5.5	140	0.6	*
<b>CP9120CR</b>	<b>615 195 2120</b>	12,000	0.8	0.6	4	100	3/8-24	11.66	5.5	23.3	11	9.3	233	1.9	*
<b>CP9121CR</b>	<b>615 195 2121</b>	12,000	0.8	0.6	4	100	3/8-24	12.7	6	25.4	12	9.6	240	2.1	*
<b>CP854</b>	<b>T023186</b>	13,000	0.7	0.52	4	100	3/8-24	6	2.8	24	11.3	9.0	229	1.7	*
<b>CP854E</b>	<b>T023187</b>	12,000	0.7	0.52	5	125	M10	4	1.9	16	7.6	9.0	229	1.7	*



VS: Vehicle Service • IND: Industrial



MODEL	PART NUMBER	FREE SPEED	POWER		CAPACITY WHEEL		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	NOISE LEVEL	VIBRATION	RATING
		rpm	KW	hp	mm	in	in	l/s	cfm	mm	in.	kg	dB(A)	m/s <sup>2</sup>	
<b>CP3450-12AC4</b>	<b>615 160 4010</b>	12,000	0.81	1.1	100	4.0	3/8-24	18.0	38	231	9.1	1.4	90	<2.5	**
<b>CP3450-12AA5</b>	<b>615 160 4040</b>	12,000	0.81	1.1	125	5.0	M14	18.0	38	231	9.1	1.7	90	<2.5	**
<b>CP3450-12AB5</b>	<b>615 160 4050</b>	12,000	0.81	1.1	125	5.0	5/8-11	18.0	38	231	9.1	1.7	90	<2.5	**
<b>CP3550-120AC4</b>	<b>615 160 7750</b>	12,000	1.1	1.5	100	4	3/8-24	17.0	36.0	252	9.9	1.7	84	<2.6	**
<b>CP3550-120AA5</b>	<b>615 160 7780</b>	12,000	1.1	1.5	125	5	M14	17.0	36.0	252	9.9	1.9	84	<4.4	**
<b>CP3650-120AB5</b>	<b>615 160 7850</b>	12,000	1.8	2.4	125	5	5/8-11	17.6	37.3	247.5	9.7	2.2	90	<2.5	***
<b>CP3650-120AA5</b>	<b>615 160 7860</b>	12,000	1.8	2.4	125	5	M14	17.6	37.3	247.5	9.7	2.2	90	<2.5	***
<b>CP3650-120AA5V</b>	<b>615 160 7870</b>	12,000	1.8	2.4	125	5	M14	17.6	37.3	247.5	9.7	2.2	92	<1.8	***



MODEL	PART NUMBER	FREE SPEED	POWER		CAPACITY WHEEL		SPINDLE THREAD	AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT	RATING
		rpm	hp	KW	in	mm	in	cfm	l/s	cfm	l/s	in.	mm	kg	
<b>CP857</b>	<b>T024387</b>	7,500	1.2	0.93	7	180	5/8-11	12	5.7	24	11.3	13.1	334	2.83	*
<b>CP9123</b>	<b>615 195 9123</b>	7,500	1.12	0.85	7	180	5/8-11	12	5.7	24	11.3	13.4	340	3.4	*
<b>CP3850-77AB7V</b>	<b>615 170 4960</b>	7,700	2.8	2.10	7	180	5/8-11	33	16	69	32	13.4	340	3	***
<b>CP3850-85AB7V</b>	<b>615 160 7440</b>	8,500	2.8	2.10	7	180	5/8-11	36	17	77	36	13.4	340	3	***
<b>CP3850-85AB7VE</b>	<b>615 160 7340</b>	6,000	2.8	2.10	7	180	5/8-11	36	17	80	38	13.4	340	3.2	***
<b>CP3330-SALAVADE</b>	<b>615 160 9250</b>	8,500	3.7	2.8	7	180	5/8-11	36	17	83	39	9.8	250	4.65	***
<b>CP3330-SALAVELE</b>	<b>615 160 9260</b>	6,000	3.7	2.8	9	230	5/8-11	22	10	70	33	9.8	250	5	***
<b>CP3330-SALAVET</b>	<b>615 160 9210</b>	6,000	3.7	2.8	6	150	5/8-11	22	10	70	33	9.8	250	4.6	***
<b>CP3340-SALAVELE</b>	<b>615 160 9320</b>	6,000	4.5	3.4	9	230	5/8-11	34	16	95	45	9.8	250	5.85	***
<b>CP3340-SALAVET</b>	<b>615 160 9270</b>	6,000	4.5	3.4	6	150	5/8-11	34	16	95	45	9.8	250	5.5	***
<b>CP3249-GABSYG</b>	<b>615 160 6130</b>	6,000	3.6	2.7	6"x1"x5/8"	150x25x15.9	5/8-11	27	13	86	41	19.4	492	5.6	***
<b>CP3249-GABSUD</b>	<b>615 160 6140</b>	4,500	3.2	2.4	8"x1"x5/8"	200x25x15.9	5/8-11	17	8	70	33	21.8	554	6.3	***



## 75 Series

MODEL	PART NUMBER	FREE SPEED	POWER		CAPACITY WHEEL		SPINDLE THREAD	AIR CONS. FREE SPEED		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT	AIR INLET	RATING
		rpm	hp	W	in	mm	in	cfm	l/s	cfm	l/s	in.	mm	kg	NPTF	
<b>CP7540-C</b>	<b>894 107 5401</b>	12,000	1.1	840	4	100	3/8-24	20	9.3	40	18.9	10.6	270	1.6	1/4"	*
<b>CP7550-A</b>	<b>894 107 5503</b>	12,000	1.1	840	5	125	M14	20	9.3	40	18.9	10.6	270	1.6	1/4"	*
<b>CP7550-B</b>	<b>894 107 5502</b>	12,000	1.1	840	5	125	5/8-1	20	9.3	40	18.9	10.6	270	1.6	1/4"	*





MODEL	PART NUMBER	FREE SPEED rpm	PAD SIZE		SPINDLE THREAD in.	AVERAGE AIR CONS.		AIR CONS. @ LOAD		DIMENSIONS				NET WEIGHT kg	AIR INLET NPTF	RATING
			in	mm		cfm	l/s	cfm	l/s	HEIGHT		LENGTH				
										in.	mm	in.	mm			
<b>CP7200</b>	<b>894 107 2001</b>	15,000	2 & 3	50 & 75	1/4-20	10.5	4.9	21	9.9	4.7	120	6.5	166	0.68	1/4"	*
<b>CP7201</b>	<b>894 107 2014</b>	2,500	3	75	1/4-20	10.5	4.9	18	8.5	5.1	130	6.5	166	0.79	1/4"	*
<b>CP7202</b>	<b>894 107 2021</b>	15,000	3	75	1/4-20	10.5	4.9	21	9.9	4.3	110	6.5	166	0.68	1/4"	*
<b>CP9778</b>	<b>615 193 9778</b>	14,000	5	125	7/16-20	13.0	6.1	26.0	12.0	4.7	120	8.2	203	1.00	1/4"	*
<b>CP3030-325AFR</b>	<b>615 162 0060</b>	25,000	2	50	1/4-20	22.0	10	1.2	6.7	4.1	103	6	154	0.8	1/4"	**
<b>CP3030-515AFR</b>	<b>615 162 0100</b>	15,000	3	75	3/8-24	25.0	12	20.6	9.7	5.5	139	7	174	0.9	1/4"	**

## Orbital Sanders



### CP35.. Series

MODEL	PART NUMBER	FREE SPEED rpm	PAD SIZE		SPINDLE THREAD in	AVERAGE AIR CONS.		AIR CONS. @ LOAD		DIMENSIONS				NET WEIGHT		PAD TYPE	AIR INLET NPTF	VAC	SEG.
			in	mm		cfm	l/s	cfm	l/s	HEIGHT		LENGTH		lb	kg				
										in.	mm	in.	mm						
<b>ORBIT 3/16" (5mm)</b>																			
<b>CP3510</b>	<b>615 193 3510</b>	12,000	5	125	5/16-24	8	3.8	16	7.6	4.1	105	6.3	160	1.63	0.74	H&L	1/4"	NV	IND
<b>CP3511</b>	<b>615 193 3511</b>	12,000	5	125	5/16-24	8	3.8	16	7.6	4.1	105	6.3	160	1.63	0.74	PSA	1/4"	NV	IND
<b>CP3512</b>	<b>615 193 3512</b>	12,000	5	125	5/16-24	8	3.8	16	7.6	4.1	105	8.3	211	1.72	0.78	H&L	1/4"	SV	IND
<b>CP3514</b>	<b>615 193 3514</b>	12,000	5	125	5/16-24	8	3.8	16	7.6	4.1	105	7.9	200	1.74	0.79	H&L	1/4"	CV	IND



### CP72.. Series

MODEL	PART NUMBER	FREE SPEED rpm	PAD SIZE		SPINDLE THREAD in	AVERAGE AIR CONS.		AIR CONS. @ LOAD		DIMENSIONS				NET WEIGHT kg	PAD TYPE	VAC	SEGMENT
			in	mm		cfm	l/s	cfm	l/s	HEIGHT		LENGTH					
										in.	mm	in.	mm				
<b>ORBIT 3/16" (5mm)</b>																	
<b>CP7255E</b>	<b>894 127 2551</b>	12,000	6	150	5/16-24	8	3.8	16	7.6	4.1	105	7.3	185	0.79	H&L	NV	VS
<b>CP7255CVE</b>	<b>894 127 2553</b>	12,000	6	150	5/16-24	8	3.8	16	7.6	4.1	105	8.7	221	0.83	H&L	CV	VS
<b>CP7255SVE</b>	<b>894 127 2552</b>	12,000	6	150	5/16-24	8	3.8	16	7.06	4.1	105	9.1	232	0.82	H&L	SV	VS



All models: Hose size 3/8" (10mm) - @90 PSI (@6.3 Bar)

VS: Vehicle Service • IND: Industrial


**CP7265S**

**CP7269S**

**CP7269P**

MODEL	PART NUMBER	FREE SPEED rpm	PAD SIZE		SPINDLE THREAD in	AVERAGE AIR CONS.		AIR CONS. @ LOAD		DIMENSIONS				NET WEIGHT kg	SEGMENT
			in	mm		cfm	l/s	cfm	l/s	HEIGHT		LENGTH			
										in.	mm	in.	mm		
<b>CP7265S</b>	<b>894 100 8650</b>	5,000	7	180	5/8-11	11.2	5.3	32	15.1	7.8	200	11.8	300	2.2	VS
<b>CP7269S</b>	<b>894 107 8690</b>	5,000	7	180	5/8-11	13.0	6.2	26.7	12.6	4.3	110	12.4	315	2.3	VS
<b>CP7269P</b>	<b>894 107 8691</b>	2,600	8	205	5/8-11	13.0	6.2	25	11.8	4.3	110	12.4	315	2.5	VS


**CP7268**

**CP858**

**CP9779**

**CP9780**

**CP5080**


## Belt Sanders

MODEL	PART NUMBER	FREE SPEED rpm	BELT CAPACITY (L x W)		AVERAGE AIR CONS.		AIR CONS. @ LOAD		DIMENSIONS LENGTH		NET WEIGHT kg	SEGMENT
			in	mm	cfm	l/s	cfm	l/s	in.	mm		
<b>CP7268</b>	<b>894 107 2680</b>	5,000	2.75x17.5	70x445	8.5	4.0	10.7	5.0	16.5	420	2.75	VS
<b>CP858</b>	<b>T025179</b>	18,000	3/8x13	10x330	11	5.2	22	10.4	12	304	0.85	VS
<b>CP9779</b>	<b>615 193 9779</b>	22,000	3/8x13	10x330	14	6.6	28	13.2	12	304	0.90	VS
<b>CP9780</b>	<b>615 193 9780</b>	20,000	3/4x20.4	20x520	15	7.0	30	14.0	15	380	1.50	VS
<b>CP5080-3260D12K</b>	<b>615 162 0050</b>	26,000	12	305	22	10	17.8	10	11	280	0.8	IND
<b>CP5080-5220H18</b>	<b>615 162 0030</b>	22,000	18	475	32	15	27.1	15	13	340	1.5	IND

## Drills


**CP785**

**CP785QC**

**CP7300C**

**CP1114**


MODEL	PART NUMBER	FREE SPEED rpm	POWER		CHUCK CAPACITY		MAX TORQUE		AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT kg	SEGMENT
			hp	W	in.	mm	ft.lb	Nm	cfm	l/s	cfm	l/s	in.	mm		
<b>CP7300C</b>	<b>894 107 3013</b>	3,300	0.30	230	1/4	6	1.9	2.6	4.1	1.9	16.5	8	7	178	0.61	VS
<b>CP785</b>	<b>T022698</b>	2,400	0.50	380	3/8	10	3.1	4.2	4.1	1.9	12	8	7	178	0.61	VS
<b>CP785QC</b>	<b>T024242</b>	2,400	0.50	380	3/8	10	3.1	4.2	5.3	2.5	12	8	6.7	170	0.64	VS
<b>CP1114R09</b>	<b>615 158 0320</b>	900	0.54	400	1/2	13	12.4	16.8	25.5	12	25.5	12	10.2	210	1.8	IND
<b>CP1114R26</b>	<b>615 158 0330</b>	2,600	0.54	400	3/8	10	4.4	5.5	32	15	25.5	12	8.8	225	1.3	IND
<b>CP1114R40</b>	<b>615 158 0340</b>	4,000	0.54	400	3/8	10	1.2	1.7	32	15	25.5	12	8.8	225	1.3	IND




**CP789R-26**

**CP789R-42**

**CP879C**

**CP9285C**


MODEL	PART NUMBER	FREE SPEED		POWER		CHUCK CAPACITY		MAX TORQUE		AVERAGE AIR CONS.		AIR CONS. AT LOAD		OVERALL LENGTH		NET WEIGHT	SEGMENT
		rpm		hp	kW	ft.lb	mm	ft.lb	Nm	cfm	l/s	cfm	l/s	in.	mm		
<b>CP789R-26</b>	● <b>T025180</b>	2,600		0.50	0.38	3/8	10	3.1	4.2	7.5	3.5	21.2	10	7.0	178	1.13	VS
<b>CP789R-42</b>	● <b>T025198</b>	4,200		0.50	0.38	3/8	10	1.9	2.5	7.5	3.5	21.2	10	7.0	178	1.13	VS
<b>CP879C</b>	<b>894 100 8790</b>	2,000		0.3	0.26	3/8	10	3.2	4.4	5.3	2.5	21.2	10	8.6	218	1.2	VS
<b>CP887C</b>	<b>894 100 8870</b>	2,100		0.4	0.30	3/8	10	3.8	5.1	5.3	2.5	21.2	10	9.25	235	1.1	VS
<b>CP9790C</b>	● <b>894 109 7900</b>	2,100		0.5	0.36	3/8	10	4.1	5.5	6.9	3.25	27.5	13	9.3	235	1.1	IND
<b>CP9285C</b>	<b>894 109 2850</b>	3,000		0.6	0.46	3/8	10	4.1	5.5	6.9	3.25	21.2	10	8.2	209	1.09	IND
<b>CP9789C</b>	● <b>894 109 7890</b>	840		0.5	0.35	1/2	13	10.3	14	6.9	3.25	27.5	13	10.4	265	1.4	IND
<b>CP789HR</b>	● <b>T025165</b>	500		0.4	0.32	1/2	13	15.6	21.1	7.5	3.5	30	14.2	8	203	1.47	VS



Reversible


**CP1014**

**CP1117P60**

**CP1117 (W/O Chuck)**

**CP1117 (Keyless)**

MODEL	PART NUMBER	FREE SPEED		POWER		CHUCK CAPACITY		MAX TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	SOUND PRESSURE	SEGMENT
		rpm		hp	W	in.	mm	ft.lb	Nm	cfm	l/s	in.	mm			
<b>CP1014</b>	<b>615 158 0010</b>	4,500		0.5	375	1/4"	10	1.3	1.7	26.5	10	6.7	170	0.69	78	IND
<b>CP1117 P60</b>	<b>615 158 8090</b>	6,000		1	750	3/8"	10	1.2	1.7	35.2	14	7.1	180	0.99	83	IND
<b>CP1014 P45</b>	<b>661 518 0010</b>	4,500		0.5	375	1/4"	6.35	1.3	1.7	26.5	12.5	6.7	170	0.69	78	IND
<b>CP1014 P33</b>	<b>615 158 0030</b>	3,300		0.5	375	1/4"	6.35	1.3	1.8	22.9	10.8	6.7	170	0.69	78	IND
<b>CP1014 P24</b>	<b>615 158 0050</b>	2,400		0.5	375	1/4"	6.35	1.7	2.3	22.9	10.8	6.7	170	0.69	78	IND
<b>CP1014 P05</b>	<b>615 158 0090</b>	500		0.5	375	3/8"	10	9.3	12.5	22.9	10.8	7.7	195	0.86	78	IND
<b>CP1117 P60</b>	<b>615 158 0090</b>	6,000		1	750	3/8"	10	1.2	1.7	35.2	16.5	7.1	180	0.99	83	IND
<b>CP1117 P32</b>	<b>615 158 0110</b>	3,200		1	750	3/8"	10	2.1	2.8	35.2	16.5	7.1	180	0.99	83	IND
<b>CP1117 P26</b>	<b>615 158 0130</b>	2,600		1	750	3/8"	10	2.9	3.9	35.2	16.5	7.1	180	0.99	83	IND
<b>CP1117 P09</b>	<b>615 158 0150</b>	900		1	750	1/2"	13	7.3	10	34.8	16.3	8.3	210	1.53	83	IND
<b>CP1117 P05</b>	<b>615 158 0170</b>	500		1	750	1/2"	13	12.3	16.7	34.8	16.3	8.3	210	1.53	83	IND

CP1117 P60, CP1117P32, P26, P09 AN PO5 are offered with keyless and with out chuck options. Please check with CP for the different part nos.


**CP1720**

**CP1820**

MODEL	PART NUMBER	FREE SPEED		POWER		CHUCK CAPACITY		MAX TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	SOUND PRESSURE	SEGMENT
		rpm		hp	W	in.	mm	ft.lb	Nm	cfm	l/s	in.	mm			
<b>CP1816</b>	<b>615 158 0300</b>	800		1	750	5/8"	16	25.3	34.3	53	25	14.3	364	1.0	90	IND
<b>CP1720</b>	<b>615 158 0250</b>	430		1.2	890	7/8"	22	59.3	80.4	53	25	18.6	472	7.0	106	IND
<b>CP1820</b>	<b>615 158 0280</b>	480		1.2	890	7/8"	22	57.8	78.4	42.4	20	11.1	282	11.1	96	IND



VS: Vehicle Service • IND: Industrial


**CP7111**

**CP7111HEX**

**CP7110**

MODEL	PART NUMBER	POWER Joule	COLD RIVET CAP.				BORE AND STROKE		BLOWSS PER MIN	CHISEL RIVET SET SHANK		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT kg	SEGMENT
			DURAL		STEEL		in.	mm		in.	mm	cfm	l/s	in.	mm		
			in	mm	in	mm											
<b>CP7110</b>	<b>894 107 1101</b>	7.2	1/4	6.4	3/16	4.8	3/4x2.63	19x67	3,200	0.401	10.2	14.6	6.9	9.0	230	1.7	VS/IND
<b>CP7111</b>	<b>894 107 1110</b>	7.2	1/4	6.4	3/16	4.8	3/4x2.63	19x67	3,000	0.401	10.2	25	11.8	6.7	171	1.6	VS/IND
<b>CP7111HEX</b>	<b>894 107 1111</b>	7.2	1/4	6.4	3/16	4.8	3/4x2.63	19x67	3,000	0.401	10.2	25	11.8	6.7	171	1.6	VS/IND
<b>CP714</b>	<b>T012735</b>	4.7	1/4	6.4	3/16	4.8	9/16x3.1	14x80	2,000	0.401	10.2	8.5	4.0	6.7	171	1.5	VS/IND
<b>CP717</b>	<b>T020120</b>	7.3	1/4	6.4	3/17	4.8	3/4x2.7	19x68	1,800	0.498	12.7	13	5.9	7.5	190	2.0	VS/IND


**CP4281**

**CP4282**

**CP4285**

**CP4287**

MODEL	PART NUMBER	POWER Joule	COLD RIVET CAP				BORE & STROKE		BLOWS PER MIN	CHISEL RIVET SET SHANK		OVERALL LENGTH mm	NET WEIGHT kg	SEGMENT
			DURAL		STEEL		in	mm		in	mm			
			in	mm	in	mm								
<b>CP4281</b>	<b>615 174 0590</b>	2.61	1/8	3.17	-	-	0.56 x 1.38	14.3 x 35	2850	0.401	10.2	115	1.06	AEROSPACE MRO
<b>CP4282</b>	<b>615 174 0600</b>	3.37	1/8	3.17	3/32	2.38	1/2 x 2.24	12.7 x 57	2580	0.401	10.2	170	1.26	AEROSPACE MRO
<b>CP4283</b>	<b>615 174 0610</b>	4.3	3/16	4.76	0.16	3.96	1/2 x 2.87	12.7 x 73	2160	0.401	10.2	186	1.36	AEROSPACE MRO
<b>CP4284</b>	<b>615 174 0620</b>	4.59	1/4	6.35	3/16	4.76	1/2 x 3.07	12.7 x 78	1740	0.401	10.2	211	1.39	AEROSPACE MRO
<b>CP4285</b>	<b>615 174 0630</b>	9.03	1/4	6.35	3/16	4.76	3/4 x 2.68	19 x 68	1600	0.498	12.64	230	2.1	AEROSPACE MRO
<b>CP4287</b>	<b>615 174 0640</b>	13.01	5/16	7.93	1/4"	6.35	3/4 x 3.86	19 x 98	1140	0.498	12.64	256	2.4	AEROSPACE MRO
<b>CP4289</b>	<b>615 174 0640</b>	13.01	3/8	9.52	5/16	7.93	3/4 x 5.20	19 x 132	900	0.498	12.64	284	2.5	AEROSPACE MRO


**CP4810CS**

**CP4820CS**

**CP4821AS**

**CP4820AL**

MODEL	PART NUMBER	MAX FORCE kN	COLD RIVET CAP				STD YOKE DIMENSION		PLUNGER FINAL STROKE AT MAX FORCE	MAX PLUNGER TRAVEL		OVERALL LENGTH mm	NET WEIGHT kg	SEGMENT
			ALUMINIUM		STEEL		REACH	GAP		in	mm			
			in	mm	in	mm								
<b>CP4210CS</b>	<b>615 171 0180</b>	13.34	1/8	3.17	3/32	2.36	38.1	32	1.3	0.56	14.27	262	2.04	AEROSPACE MRO
<b>CP4220CS</b>	<b>615 171 0190</b>	26.89	3/16	4.75	0.16	3.96	38.1	32	1.3	0.56	14.27	355	2.49	AEROSPACE MRO
<b>CP4210AS</b>	<b>615 171 0200</b>	13.34	1/8	3.17	3/32	2.36	38.1	40	1.3	0.62	15.9	233	1.7	AEROSPACE MRO
<b>CP4210AL</b>	<b>615 171 0220</b>	8	3/32	2.36	1/16	1.58	76.2	44	1.3	3/4	19.05	273	2.1	AEROSPACE MRO
<b>CP4220AS</b>	<b>615 171 0210</b>	26.68	3/16	4.75	0.16	3.96	38.1	40	1.3	0.62	15.9	284	2.2	AEROSPACE MRO
<b>CP4220AL</b>	<b>615 171 0230</b>	18.23	1/8	3.17	3/32	2.36	76.2	44	1.3	3/4	19.5	343	2.5	AEROSPACE MRO




**CP9363-4H**

**CP9373**

## 93 Series

MODEL	PART NUMBER	BORE		STROKE		SHANK		BLOWSS PER MIN	VIBRATION LEVEL ISO		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT kg	AIR INLET NPTF	SEGMENT
		in	mm	in	mm	in.	mm		a	k	cfm	l/s	in.	mm			
<b>CP9363-2H</b>	<b>615 161 2060</b>	1.1	29	2	51	0.580	14.2	2,100	13.8	2.9	30.0	14.0	15.4	390	7.4	3/8	IND
<b>CP9363-3H</b>	<b>615 161 2080</b>	1.1	29	2.5	64	0.580	14.2	1,750	14.4	3.1	32.0	15.0	17.3	440	7.7	3/8	IND
<b>CP9363-4H</b>	<b>615 161 2100</b>	1.1	29	4	102	0.580	14.2	1,600	16.2	3.3	33.0	15.7	18.5	470	8.4	3/8	IND
<b>CP9373-2H</b>	<b>615 161 2020</b>	1.1	29	2	51	0.580	14.2	2,600	12.4	3.9	30.0	14.0	14.6	370	8.2	7/8	IND
<b>CP9373-3H</b>	<b>615 161 2040</b>	1.1	29	2.5	64	0.580	14.2	2,150	13.7	3.1	31.0	14.9	15.7	400	8.8	7/8	IND
<b>CP9373-4H</b>	<b>615 161 2060</b>	1.1	29	4	102	0.580	14.2	1,700	14.3	2.9	33.0	15.7	16.7	4250	9.2	7/8	IND

CP93 series chipping hammers are available with round spape shank as well


**B15B**

**B19B**

## Chipper

MODEL	PART NUMBER	BORE		STROKE		SHANK			BLOWSS PER MIN.	AIR CONS. @Load		NET WEIGHT kg	OVERALL LENGTH		VIBRATION		SOUND PRESS ISO 15744-dB(A)	SOUND POWER	AIR INLET NPTF	SEGMENT
		in	mm	in	mm	shape	in.	mm		blows/min	cfm		l/s	in.	mm	a				
<b>B15B</b>	<b>615 174 0230</b>	0.7	18	1.1	30.0	Qtr. Oct WF	1/2	12,7	3,800	3.0	1.4	1.5	7.9	201	12.0	3.8	86	97	1/4"	IND
<b>B16B</b>	<b>615 174 0250</b>	0.9	23.5	1.4	35.6	Qtr. Oct WF	1/2	12,7	3,000	5.5	2.6	2.0	9.1	231	24.0	4.0	86	97	1/4"	IND
<b>B18B</b>	<b>615 174 0270</b>	0.9	23.5	1.4	35.6	Qtr. Oct WF	1/2	12,7	3,000	5.5	2.6	2.0	6.8	173	25.0	5.0	86	97	1/4"	IND
<b>B19B</b>	<b>615 174 0300</b>	1.1	28.6	1.5	39.0	Qtr. Oct WF	1/2	12,7	2,200	8.0	3.8	3.0	7.5	191	33.0	8.0	92	103	1/4"	IND


**B20**

**B20-0**

## Long Reach Scaler

MODEL	PART NUMBER	POWER Joule	BORE AND STROKE		NEEDLE CAPACITY (N°XØ)	BLOWSS PER MIN. bpm	SHANK		AIR CONS.		OVERALL LENGTH		NET WEIGHT kg	NOISE LEVEL dB(A)	VIBRATION m/s²	AIR INLET NPTF	SEGMENT
			mm	in			mm	in.	l/s	cfm	mm	in.					
<b>B20</b>	<b>615 174 0340</b>	2.5	28.6x39	1.12x39	28x3 mm or	2,200	Hex. 5/8	2.1	4.5	1,400	55.1	5.5	86	8.1	1/4"	IND	
<b>B20-0</b>	<b>615 174 0350</b>	2.5	28.6x39	1.12x39	35x4 mm with	2,200	Hex. 5/8	2.1	4.5	1,100	43.3	4.9	83	9.1	1/4"	IND	
<b>B20-00</b>	<b>615 174 0360</b>	2.5	28.6x39	1.12x39	dedicated spares	2,200	Hex. 5/8	2.1	4.5	1,710	67.3	3.7	84	10.5	1/4"	IND	


**B15M  
Needle Scaler**

**CP7120**

**B18M**

**CP0456 LASAN**


MODEL	PART NUMBER	BORE		STROKE		NEEDLES CAPACITY Qty x Ø	BLOWS PER MIN. blows/min	AIR CONS. @Load		NET WEIGHT kg	OVERALL LENGTH		VIBRATION		SOUND PRESS ISO 15744-dB(A)	SOUND POWER	AIR INLET NPTF	SEG.
		in	mm	in	mm			cfm	l/s		in.	mm	a	k				
<b>B15M</b>	<b>615 174 0240</b>	0.7	18	1.1	30.0	12 x 3 (1/8)	3,800	3.0	1.4	1.6	13.2	335	10.6	6.3	97	108	1/4"	IND
<b>B16M</b>	<b>615 174 0260</b>	0.9	23.5	1.4	35.6	19 x 3 (1/8)	3,000	5.5	2.6	2.6	14.4	366	12.5	7.5	100	111	1/4"	IND
<b>B18M</b>	<b>615 174 0280</b>	0.9	23.5	1.4	35.6	19 x 3 (1/8)	3,000	5.5	2.6	2.6	12.4	315	19.1	5.7	100	111	1/4"	IND
<b>CP0456-LESAR</b>	<b>T013046</b>	0.9	23.8	1	25.4	19 x 3 (1/8)	4,300	10.0	4.7	1.6	8.6	219	25.7	5.0	95	106	1/4"	IND
<b>CP0456 LASAN</b>	<b>T013049</b>	0.9	23.8	1	25.4	19 x 3 (1/8)	4,300	13.9	6.6	2.7	16.3	413	16.8	3.2	97	108	1/4"	IND
<b>CP7120</b>	<b>894 107 1200</b>	1.0	25	1.1	28.4	19 x 3 (1/8)	4,800	4.0	1.9	2.8	18.0	457	11.4	3.4	99	110	1/4"	IND


**CP0200B22-2F**

**CP0200B32L**

## Sand Rammers

MODEL	PART NUMBER	BLOWS PER MIN. blows/min	BORE		STROKE		BUTT DIAMETER		AIR CONS. @Load		OVERALL LENGTH mm	NET WEIGHT kg	NOISE dB (A)	VIBRATION m/s <sup>2</sup>	MIN HOSE SIZE mm	SEGMENT
			in	mm	in	mm	in	mm	cfm	l/s						
CP0200B18	615 161 8010	1800	0.71	18	1.97	50	1.61	41	14.1	6.67	280	1.5	95	19.4	10	IND
CP0200B22-2F	615 161 8040	1020	0.85	22	2.51	64	2.01	51	17.7	8.37	350	3	95	19.4	10	IND
CP0200B25	615 161 8050	780	1.0	25.4	3.26	83	2.64	67	24.7	11.67	506	5.5	95	19.4	13	IND
CP0200B25L-2F	615 161 8130	780	1.0	25.4	3.26	83	2.64	67	24.7	11.67	1044	6	95	19.4	13	IND
CP0200B32L	615 161 8070	720	1.26	32	5	127	2.95	75	28.3	13.38	1087	10	95	26	13	IND


**CP9161**

**CP9361**

**CP9361-1**

## Engraving Pens

MODEL	PART NUMBER	BLOWS PER MIN.	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL dB(A)	VIBRATION m/s <sup>2</sup>	SEGMENT
			l/s	cfm	mm	in.	kg	lb			
CP9361	T012644	13,500	0.5	1.10	127	5.0	0.14	0.31	79	2.7	IND
CP9361-1	T011970	13,500	0.5	1.10	127	5.0	0.14	0.31	79	2.7	IND
CP9161	615 182 0000	11,400	0.6	12.7	175	6.9	0.12	0.25	72	5.6	VS

# Speciality Tools


**CP7901 Saw**

**CP7900 Saw**

**CP881 Saw**

MODEL	PART NUMBER	STROKES PER MN	STROKE		AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT kg	AIR INLET NPTF	SEGMENT
			in.	mm	cfm	l/s	cfm	l/s	in.	mm			
CP7901	894 107 9011	10,000	1	25	1.4	0.6	5.5	2.6	9.0	229	0.86	1/4"	VS
CP7900	894 107 9000	10,000	3/8	10	1.4	0.6	5.5	2.6	8.5	216	0.59	1/4"	VS
CP881	T023916	9,500	3/8	10	1.5	0.6	6.0	2.8	8.6	219	0.74	1/4"	VS


**CPP861 Cutter**

**CP874 Cutter**

MODEL	PART NUMBER	CHUCK / WHEEL SIZE		FREE SPEED rpm	AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT kg	AIR INLET NPTF	SEGMENT
		in.	mm		cfm	l/s	cfm	l/s	in.	mm			
CP861	T022039	2-7/8	73	20,000	2.1	1.0	8.5	4.0	7.8	197	0.74	1/4"	VS
CP874	T025375	2-7/8	73	22,000	3.1	1.4	12.5	5.9	7.2	184	0.79	1/4"	VS

VS: Vehicle Service • IND: Industrial





**CP871C**



**CP873C**



## Tyre Buffers

MODEL	PART NUMBER	CHUCK / WHEEL SIZE		FREE SPEED rpm	POWER		AIR CONS.		DIMENSIONS		VIBRATION	NET WEIGHT kg	MIN. HOSE SIZE	SEGMENT
		in.	Type		hp	watt	cfm	l/s	in.	mm				
<b>CP871C</b>	<b>894 017 6889</b>	3/8	Jacob	22,000	0.47	350	3.1	1.5	7.9 x 3.0 x 1.8	201 x 75 x 46	4.04	0.75	10	VS
<b>CP873C</b>	<b>894 017 6891</b>	7/16	Hex	3,000	0.47	350	3.1	1.5	8.7 x 3.0 x 1.8	220 x 75 x 46	1.11	1.02	10	VS
<b>CP873C-HD</b>	<b>894 017 7048</b>	7/16	Hex	3,500	0.67	500	3.1	1.5	8.7 x 3.0 x 1.8	220 x 75 x 46	0.73	1.05	10	IND
<b>CP873C-HDES</b>	<b>894 017 7047</b>	7/16	Hex	3,500	0.67	500	3.1	1.5	11.9 x 3.0 x 1.8	301 x 75 x 46	0.82	1.16	10	IND



**CP785S Shear**



**CP835 Nibbler**



**CP9705 File**



**CP9710 File**

MODEL	PART NUMBER	STROKES PER MN	AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT		AIR INLET NPTF	SEGMENT
			cfm	l/s	cfm	l/s	in.	mm	lb	kg		
<b>CP785S</b>	<b>T023200</b>	2,400	3.7	1.8	15	7.3	9.0	229	1.9	0.86	1/4"	VS/IND
<b>CP835</b>	<b>T022550</b>	2,750	4.2	2.0	17	8.0	8.5	216	1.3	0.59	1/4"	VS/IND
<b>CP9705</b>	<b>615 193 9705</b>	12,000	1.5	0.7	6	2.8	8.0	204	1.2	0.56	1/4"	VS/IND
<b>CP9710</b>	<b>615 193 9710</b>	8,000	1.5	0.7	6	2.8	9.8	250	1.3	0.59	1/4"	VS/IND



**CP9882**



**CP9886 Riveter**



**CP9887 Riveter**



**CP9888 Riveter**



## Pop Riveters

MODEL	PART NUMBER	TRACTION POWER N	RIVETING CAPACITY		STROKE mm	NOSE PIECES		VIBRATION m/s <sup>2</sup>	AIR CONS. @Load		OVERALL LENGTH mm	NET WEIGHT kg	SEGMENT
			Max Size	Material		In	mm		cfm	l/s			
<b>CP9882</b>	<b>894 109 8820</b>	9800	4.8 mm	AL, Cu	NA	3/32, 1/8, 5/32 & 3/16	2.4/3.2/4 /4.8	<2.5 m/s <sup>2</sup>	4	1.9	225	1.5	VS/IND
<b>CP9886</b>	<b>894 109 8860</b>	12600	4.8 mm	Al, Cu, SS	19	1/8, 5/32 & 3/16	3.2/4.0/4.8	2.5 m/s <sup>2</sup>	1.2	0.57	277	1.7	VS/IND
<b>CP9887</b>	<b>894 109 8870</b>	21000	Blind: 6.4 mm Bulb: 7.8 mm	Al, Cu, SS	27	3/16, 1/4	Blind : 4.8/6.4 Bulb: 5.2/6.2/ 7.8	2.5 m/s <sup>2</sup>	1.2	0.57	325	2.5	VS/IND
<b>CP9888</b>	<b>894 109 8880</b>	24000	M12	Al, Cu, SS	1-7(Adjust)	-	M3 to M12	2.5 m/s <sup>2</sup>	0.85	0.4	280	2.5	VS/IND



**ERGO SEAT**



**1 TON FOLDABLE WORKSHOP CRANE**



Discover more range of Workshop Equipments




**PNEUMATIC HOIST LIFTING CAPACITY: 0.5 ton & 1 ton**

## Recommended Air Tools Installation by Chicago Pneumatic:

Scan the code



or visit <http://qr.cp.com/guide-air-tool-installation>

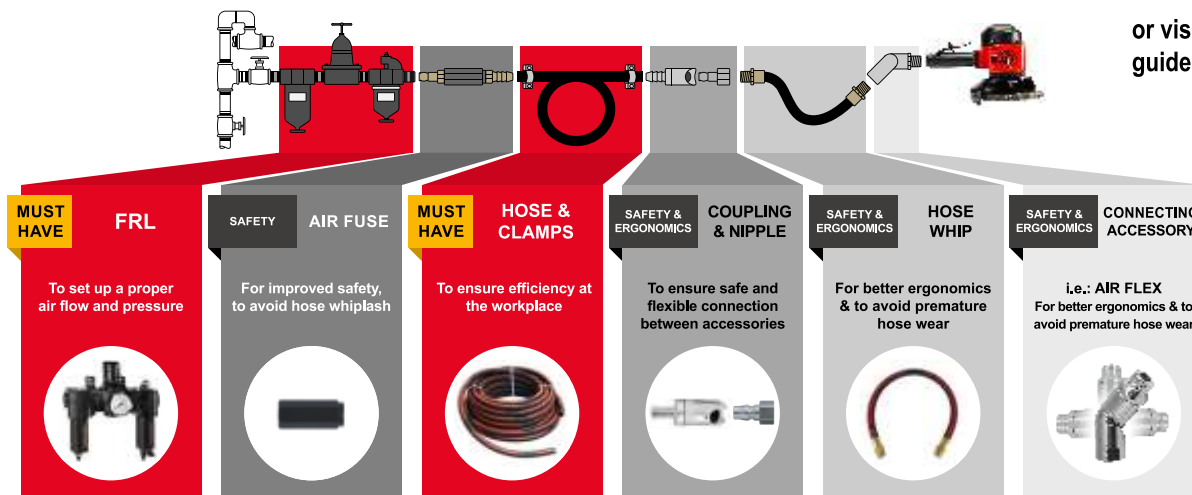

### PERFORMANCE

Optimize the performance of your power tool by using accessories specifically designed to leverage the full capacity of each tool, while extending its lifespan.



#### Effi max hose

Robust but light, a heavy-duty hose to power your tool.



#### Pneumatic oil

Specific air oil to lubricate air tools in order to ensure the best performance and a longer lifetime.



### SAFETY

Reduce the risk of accidents with a selective list of accessories which can:



#### Air fuse

Fixed on the air line, it cuts the air off in case of air line breakage.



#### Easy flow coupling

Ensures a safe disconnection of the hose under air pressure but keep the same air performance.



### ERGONOMIC

Transform your experience by selecting accessories bringing more comfort while enabling to reach higher productivity everywhere: at tool, operators and workstation levels.



#### Hose reel

For clean and hose free workshop.



#### Air flex

Make all rigid hoses flexible and multidirectional.

TOOL INLET SIZE	HOSE WHIP	ADAPTOR	COUPLING	AIR HOSE	ADAPTOR	COUPLING	FRL
		QUICK CHANGE	QUICK CHANGE		QUICK CHANGE	QUICK CHANGE	
1/4"	LEADER HOSE - 1/4"NPTM - 3/8"BSPF - 0.5M L	3/8" Male BSPT	3/8" BSP Female	Recoil Hose, 10 x 14 with 3/8" M x 1/2" M End Fittings, Length = 5.18 Mtrs YELLOW	3/8" BSPT Female	3/8" Male BSP	1/2" (F BSP) 2 STAGE FRL
	1280597105	8951011810	8951011788		8951011814	8951011786	
3/8"	LEADER HOSE - 1/4"NPTM - 3/8"BSPF - 0.5M L	3/8" Male BSPT	3/8" BSP Female	Recoil Hose, 10 x 14 with 3/8" M x 1/2" M End Fittings, Length = 5.18 Mtrs YELLOW	3/8" BSPT Female	3/8" Male BSP	1/2" (F BSP) 2 STAGE FRL
	1280597105	8951011810	8951011788		8951011814	8951011786	
1/2"	LEADER HOSE - 1/2"BSPF - 0.2 M L	1/2" Male BSPT	QUICK COUPLING ISO7, 2MM SCREW F 1/2" BSP	HOSE KIT RUB 18X24MM 8M (5/8"ID) 1/2 BSP	NIPPLE ISO7, 2MM SCREW F 1/2" BSP	QUICK COUPLING ISO7, 2MM SCREW F 1/2" BSP	3/4" (F BSP) 2 STAGE FRL
	1280597109	8951011811	8951011789		8951011814	8951011789	

# CHICAGO PNEUMATIC AIR MOTORS: A COMPLETE AND VERSATILE RANGE

Chicago Pneumatic offers a wide range of rotating vane air motors in stainless steel and lubrication free versions:

- Power ranging from 0.16 kW (0.21 HP) to 1.8 kW (2.45 HP)
- Most motors can be supplied as either unidirectional with a threaded shaft, or reversible with a keyed shaft. Alternative output options are also available
- **ATEX** certified for environments with potentially explosive atmospheres.

You can view our complete range on our website [www.cp.com](http://www.cp.com) or on our online catalogue [m.cp.com](http://m.cp.com) by **flashing this QR Code:**



You will be able to browse our air motor portfolio and for each model you can access:

- Downloadable CAD drawings in all formats to integrate into your projects
- Performance curve to determine which model to choose
- Product pictures

Also, a complete range of accessories is available to ease air motors installation.


**Chicago Pneumatics' vane air motor is a comprehensive air motor system combining multiple configuration set-ups:**

Compact and well-balanced design	Resistant in hostile environments
Powerful stalling resistance without overheating	

With more than **100 different motors**, the range is subdivided in **3 categories**: standard, stainless steel and low speed.



**Standard air motors** are compact in design, light in weight, and available with a variety of speed and torque requirements. They are suitable for building into handheld machines or any industrial equipment.



**Stainless steel motors** are suitable for corrosive environment applications. This would include food processing industries or chemical industries.



**Low speed air motors** offer a low costing complete solution, when an application requires low speed and low torque. The air consumption is relatively constant regardless of the load applied.



At Chicago Pneumatic we have a passion for performance and long-lasting partnerships. Since 1901, we are committed to reliability based on technology and trust.



**People. Passion. Performance.**

For quick access to our online catalogue; please visit <https://etools.cp.com>

For more information, please contact your CP partner.

**Chicago Pneumatic Tools**

Excellence Centre, India Land - Global Industrial Park, Plot No. 12,  
Hinjewadi, Phase 1, Pune - 411057, INDIA

**Pune** : 9312967925  
**Mumbai** : 7567715491  
**Ahmedabad** : 9766727491

**Gurugram** : 8698176022  
**Kolkata** : 9561110387

**Bengaluru** : 9168690201  
**Chennai** : 9380448484  
**Hyderabad** : 9160252233

